

## Technical Specifications:

### Operating Pressure:

Min: 150kPa/1.5bar

Max: 550kPa/5.5bar

Optimum: 150kPa/1.5bar - 550kPa/5.5bar

Recommended installation of pressure limiting valve if supply exceeds 550kPa


### Operating Temperature:

Hot: Max 80°C

Cold: Min 5°C

### Inlet Connections:

All ½" BSP

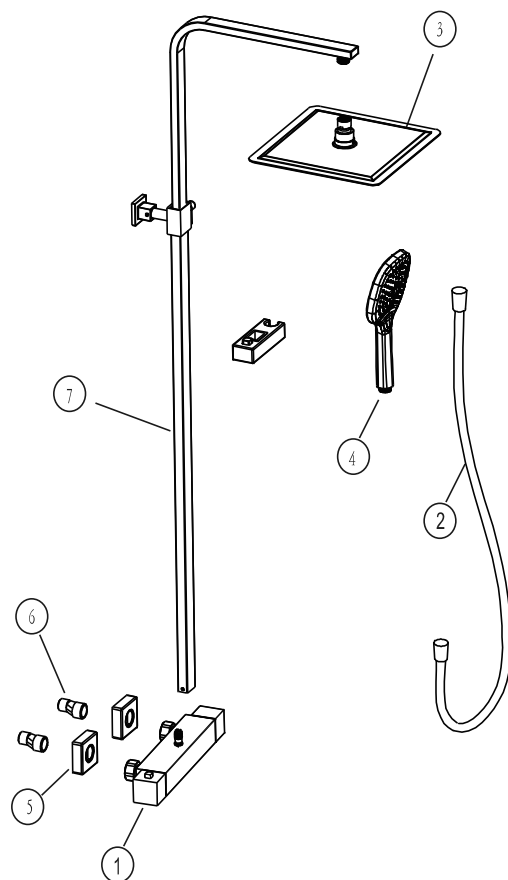

|     |                              |     |
|-----|------------------------------|-----|
| 7   | BARRA / ARM                  | 1   |
| 6   | SS gauge                     | 2   |
| 5   | PLACCHETTA / FLANGE          | 2   |
| 4   | DOCCETTA / HANDSET           | 1   |
| 3   | SOFFIONE / RAIN SHOWER       | 1   |
| 2   | FLESSIBILE IN PVC / PVC HOSE | 1   |
| 1   | CORPE MISCELATORE/ROUND BODY | 1   |
| NO. | Componente / Component       | Qty |

## MOD. PREVETO TERMOSTATICO LCDQ1115CT / LCDQ1115BT

### SPECIFICHE TECNICHE:

#### PRESSIONE OPERATIVA:

Min: 150kPa/1.5bar

Max: 550kPa/5.5bar

Ottimale: 150kPa/1.5bar - 550kPa/5.5bar


#### Temperatura operativa:

Calda: Max 80° C


Fredda: Min 5° C

#### Conessione:


All ½" BSP

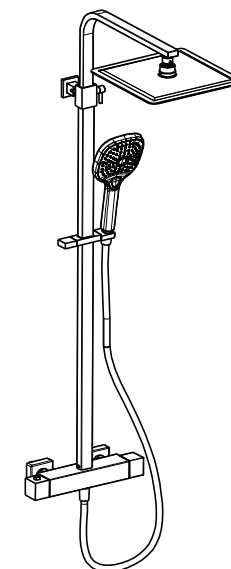


### Scheda Tecnica / Technical Drawing

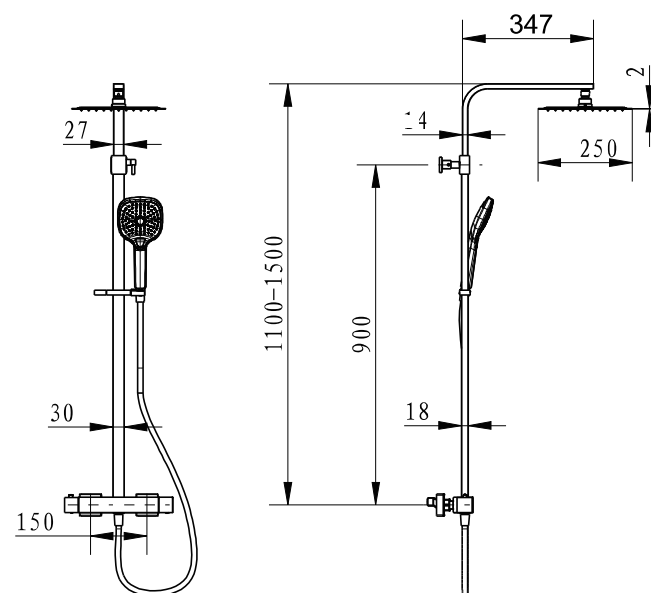


1.

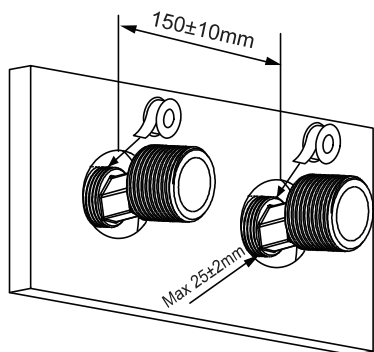


2.

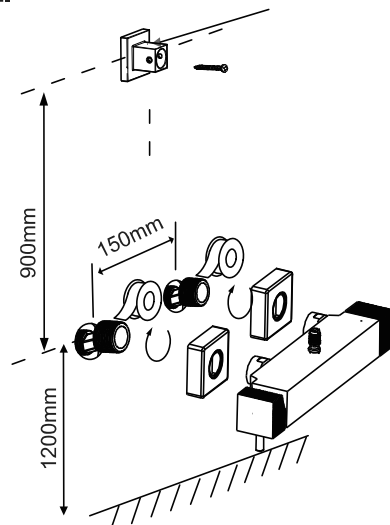


3.

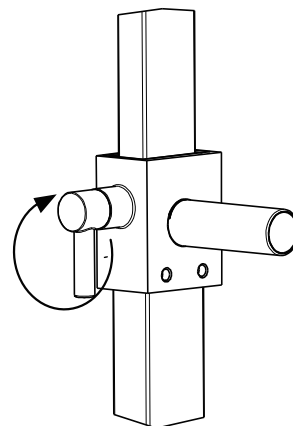


4.

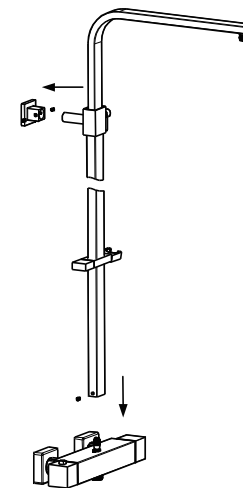

5.

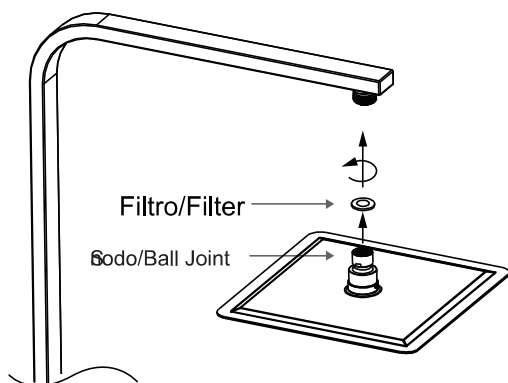


6.

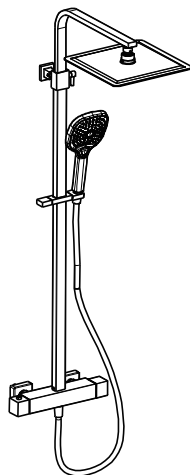

## PULIZIA E MANUTENZIONE CLEANING AND MAINTENANCE



Do not use any sharp objects to clean nozzles  
Non utilizzare alcun oggetto che possa graffiare il soffione.



Clean filter washer periodically.  
Pulire il filtro periodicamente.



## PREVETO TERMOSTATICO

